



### Standards

EN140: 1998 Mask Body  
EN14387: 2004 + A1: 2008 AE1  
CE 0194

### Efficiency

At 1000 ppm:  
Cyclohexane (C<sub>6</sub>H<sub>12</sub>) > 70 minutes  
Sulphur dioxide (SO<sub>2</sub>) > 20 minutes

### Weight

Mask + Filter: net (S/M) 295 g; (M/L) 302 g  
gross (S/M) 376 g; (M/L) 410 g  
Filter: net 95 g each; both net 190 g, gross 203 g

### Shelf Life

3 years (mask & filters) See storage conditions on Instructions for Use.  
Filters are re-usable and changeable.

### Material


- Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- Filters:** Activated carbon sealed into a ABS Shell.

### Production

United Kingdom, Italy, Romania

Structure to help airflow diffusion and full usage of the activated carbon

Activated carbon treated for gas adsorption

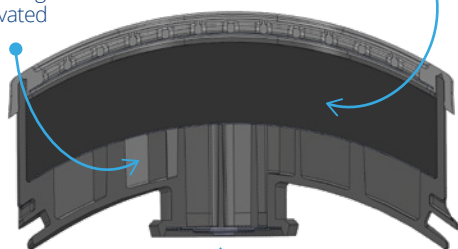

Inhalation valve

Code	Description	Quantity
SPR517 (S/M) SPR518 (M/L)	AE1 Reusable Half Mask for multiple Gases and Vapours and Dust	8 pcs. per box
SPR519	AE1 Replacement filters	5 sets of 2 pcs. per box
SPM009	Elipse High efficiency Mask Carry Case (Belt holder)	10 sets per box
SPR523	Cases for P3 filters	15 sets of 2 pcs. per box
SPM524	Pair of P3 filters	15 sets of 2 pcs. per box

## Applications - Universal gases, dust, mist and fumes

### Type



### Protection

- A** organic gases and vapours with a boiling point above 65°C
- B** inorganic gases and vapours (excluding carbon monoxide)
- E** sulphur dioxide and other acidic gases and vapours
- K** ammonia and organic ammonia derivatives

